

SD Aluminium

BALUSTRADE

PRODUCT CATALOGUE



*Enhance Your Outdoor Space with the Style of
Our Balustrade Systems*

2026-2027 Edition

Our Story ...

At the core of our business is a passion for delivering high-quality aluminium balustrade systems. Drawing on years of experience in aluminium fabrication, we have developed solutions that strike the ideal balance between aesthetics, functionality, and ease of installation.

Our balustrade systems are designed for both residential and commercial applications. With a wide range of profiles, fixing options, and finishes available, we offer flexible solutions to suit a variety of project requirements and design preferences.

Find the right fit

Every project is unique, and so is every balustrade system we offer. This catalogue is designed to help you choose the right style, fixing method, and finish to suit your site and preferences. Whether you're after clean lines, modern minimalism, or a more classic design, we make it simple to find the perfect fit for your project.

Explore Our Range ...

<i>Project Gallery</i>	_____	1 - 5
<i>Installation Guide</i>	_____	6 - 7
<i>ClearView</i>	_____	8
<i>EdgeLine 4025</i>	_____	9
<i>EdgeLine 5025</i>	_____	10 - 11
<i>GapLine 4025</i>	_____	12
<i>GapLine 5025</i>	_____	13 - 16
<i>GapLine 3825</i>	_____	17 - 18
<i>GapLine 4040</i>	_____	19 - 20
<i>LinearView</i>	_____	21 - 23
<i>FrameLine 4040</i>	_____	24 - 26
<i>FrameLine 5025</i>	_____	27 - 28
<i>SkyLine</i>	_____	29
<i>FloatLine</i>	_____	29
<i>CrossLine</i>	_____	30



Balustrade that fits _____

**YOUR STYLE
YOUR SPACE
YOUR STANDARD**

Projects



Long Lifespan: *Due to their resistance to rust and corrosion, aluminium fences typically have a longer lifespan compared to other materials. This longevity translates to extended durability and cost-effectiveness over the fence's lifespan.*

Environmental Friendliness: *Aluminium is a recyclable material, making aluminium fences an eco-friendly choice for environmentally-conscious consumers. Choosing aluminium helps reduce the demand for new raw materials and minimizes environmental impact.*

Projects



Low Maintenance: *Unlike wood or wrought iron fences that may require regular painting, staining, or sealing, aluminium fences are virtually maintenance-free. A simple occasional cleaning with soap and water is usually sufficient to keep them looking pristine, reducing the need for ongoing upkeep.*

Versatility: *Aluminium fences are available in a wide range of styles, colours, and heights, making them suitable for various aesthetic preferences and functional needs. Whether you prefer a traditional or modern look, there's an aluminium fence design to complement any property.*

Projects



Security: *Aluminium fences provide a secure boundary for residential, commercial, or industrial properties. Their sturdy construction and customizable height options help deter trespassers and enhance overall security measures.*

Cost-Effectiveness: *While aluminium fences may have a higher upfront cost than some other materials, their long-term benefits, such as low maintenance and durability, often outweigh the initial investment. In the long run, choosing aluminium can save money on maintenance and replacement costs, making it a cost-effective fencing option.*

Projects



Easy Installation: *Experience hassle-free installation with our user-friendly design. Save time and effort while enjoying the benefits of a secure and attractive aluminium fence around your property.*

Durability: *Aluminium fences are highly durable, capable of withstanding various weather conditions without corroding or rusting. This durability ensures that your fence maintains its structural integrity and appearance for years to come, providing long-term value and peace of mind.*

Projects




Long Lifespan: *Due to their resistance to rust and corrosion, aluminium fences typically have a longer lifespan compared to other materials. This longevity translates to extended durability and cost-effectiveness over the fence's lifespan.*

Environmental Friendliness: *Aluminium is a recyclable material, making aluminium fences an eco-friendly choice for environmentally-conscious consumers. Choosing aluminium helps reduce the demand for new raw materials and minimizes environmental impact.*

Glass Balustrade

Side-Fixed Installation Glass Balustrade

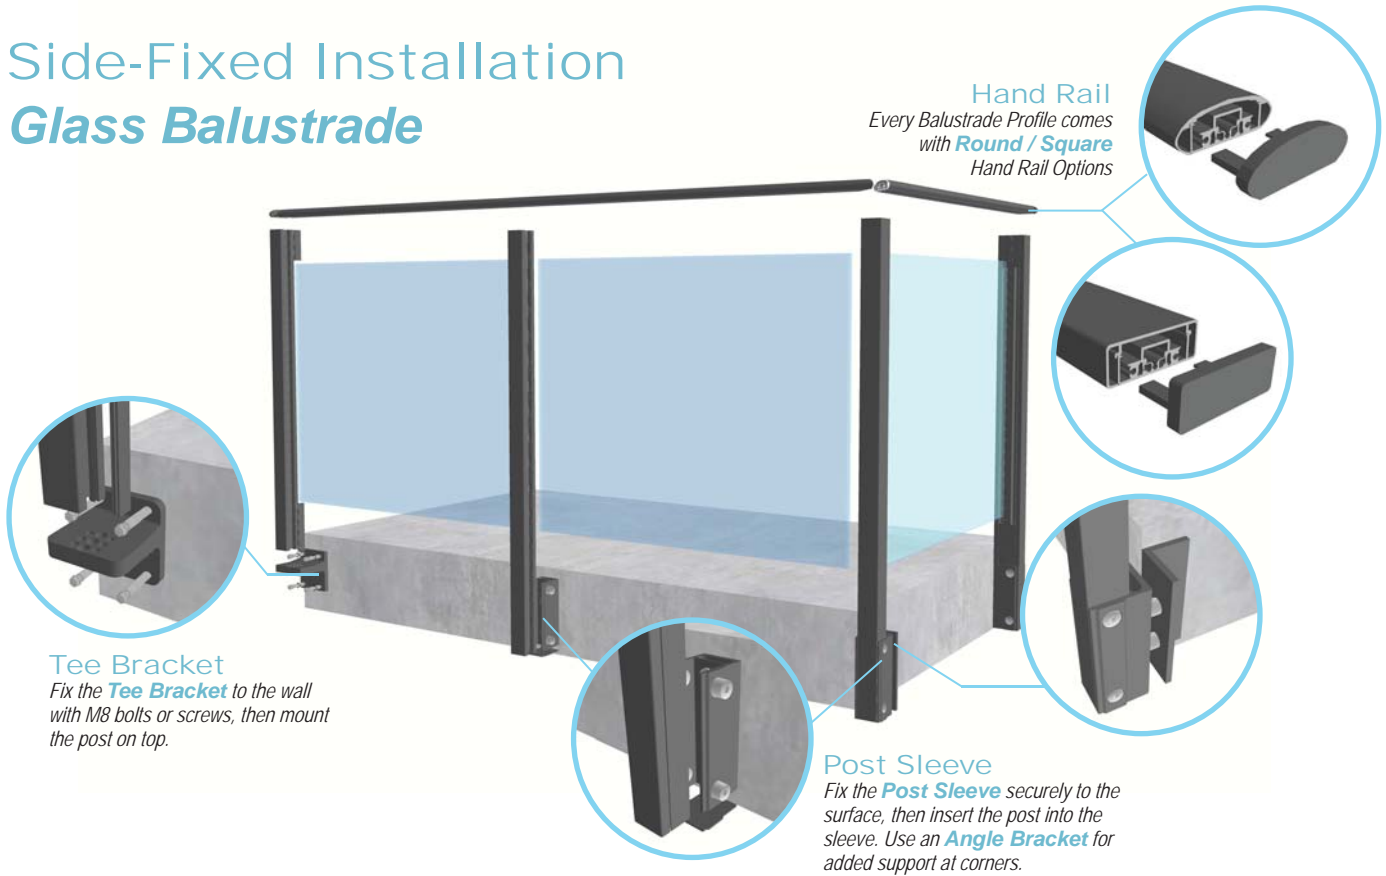

Top-Fixed Installation Glass Balustrade



Aluminium Balustrade

Side-Fixed Installation Aluminium Balustrade



Face Fixed
Fix the post straight to the wall using **Coach Screws**.

Tee Bracket
Fix the **Tee Bracket** to the wall with M8 bolts or screws, then mount the post on top.

Side Box Bracket
Attach a **Side Bracket Int** to the wall and install the **Side Bracket Ext** with Infills on with screws.

Post Sleeve
Fix the **Post Sleeve** securely to the surface, then insert the post into the sleeve. Use an **Angle Bracket** for added support at corners.

Hand Rail
Every Balustrade Profile comes with **Round / Square** Hand Rail Options



Top-Fixed Installation Aluminium Balustrade



Flange Plate
Attach the **Flange Plate** to the base of the post, then bolt the post directly to the surface.

Flat Bar
Use **Preforated Flat Bar** as **Top & Bottom Rails**

ClearView GM-SDBL-01

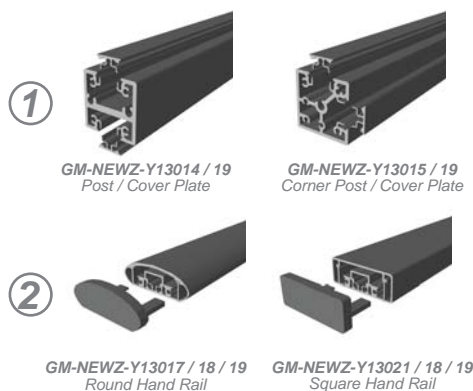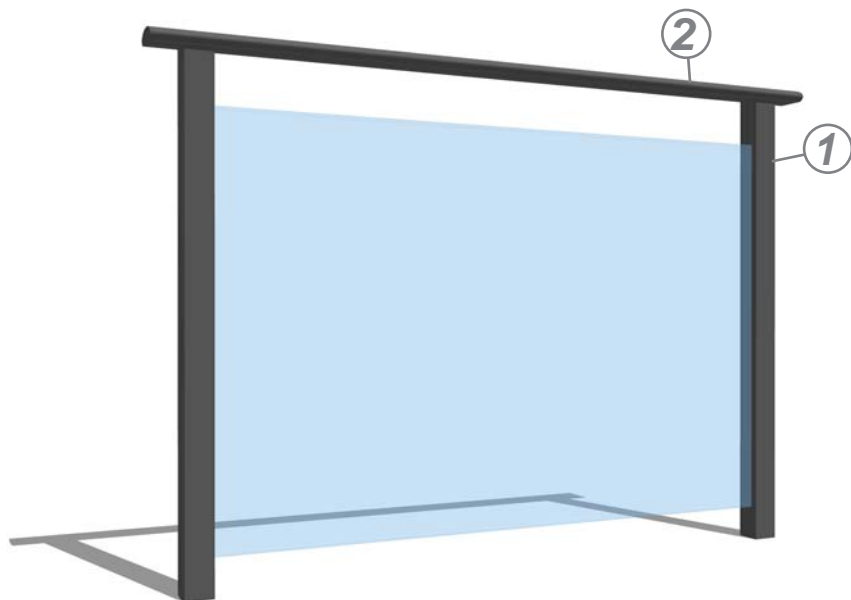


Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.

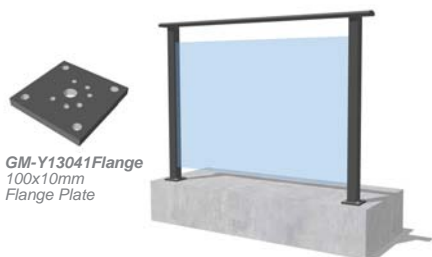

GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Panel Standard Sizes

Height **1.0m - 1.2m**

Width **1.0m - 1.5m**

Other sizes can be customized according to customer preferences.


Standard Color Options

 *Matt Black
Powdercoating*

 *Matt Ironsand
Powdercoating*

Additional colours can be customised to complement your home's exterior.

EdgeLine 4025 GM-SDBL-05

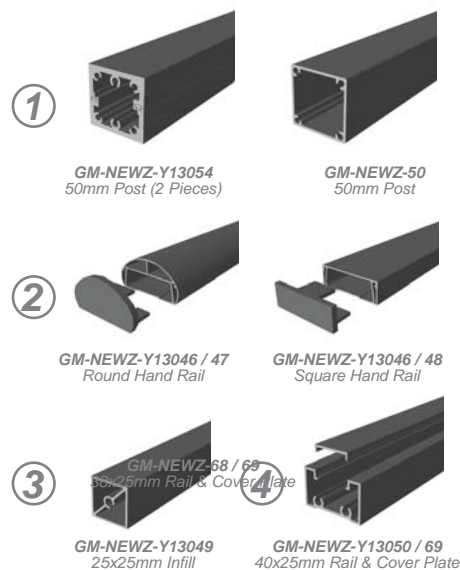

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Panel Standard Sizes

Height **1.0m - 1.2m**

Width **1.0m - 1.5m**


Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

EdgeLine 5025 GM-SDBL-28

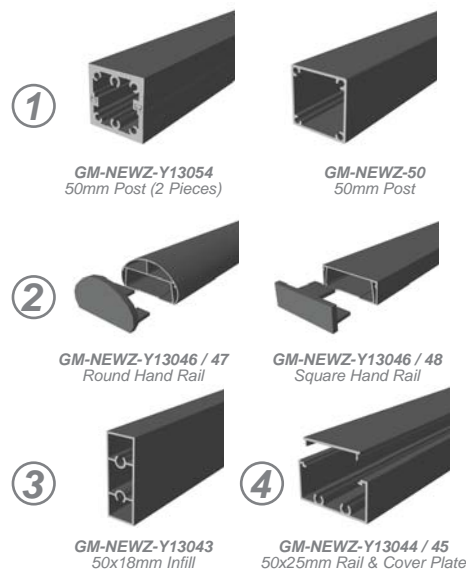

Installations

Option 1: TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2: SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3: SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4: SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation: SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 **Matt Black**
Powdercoating

Additional colours can be customised to complement your home's exterior.

EdgeLine 5025 GM-SDBL-16

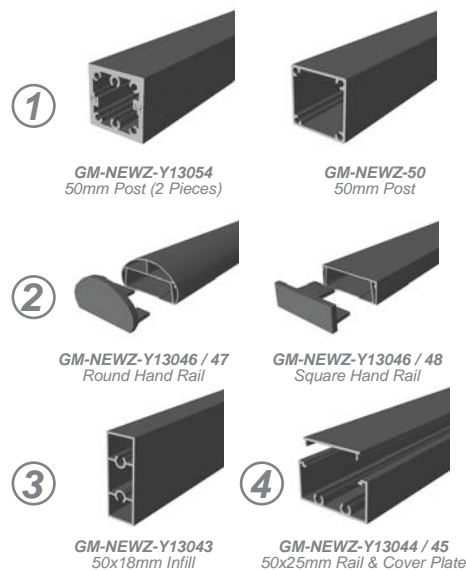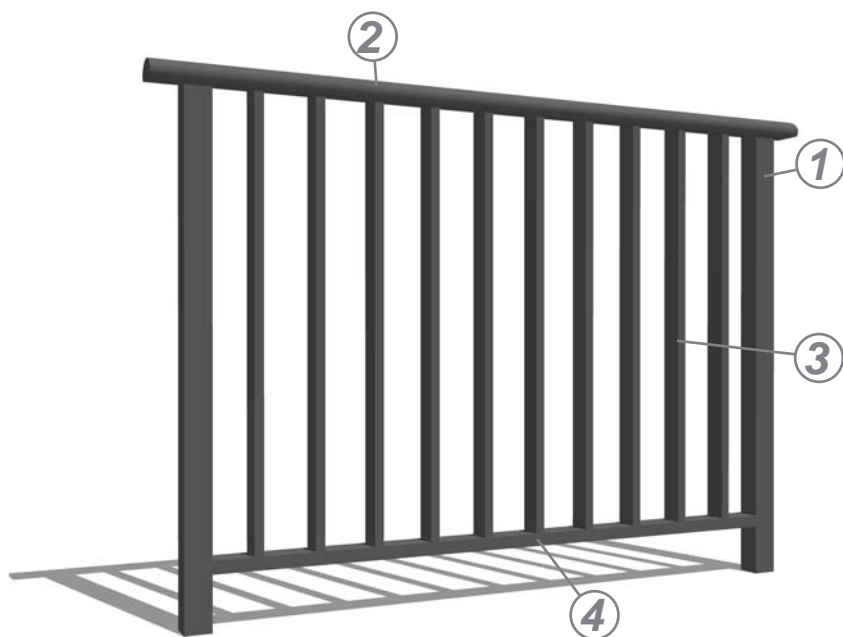

Installations

Option 1: TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2: SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3: SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4: SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation: SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 4025 GM-SDBL-13

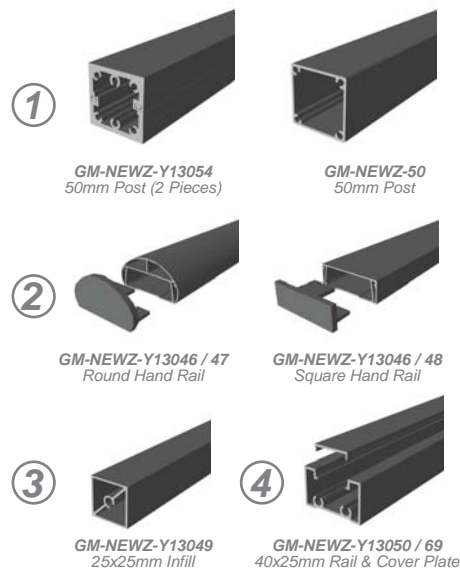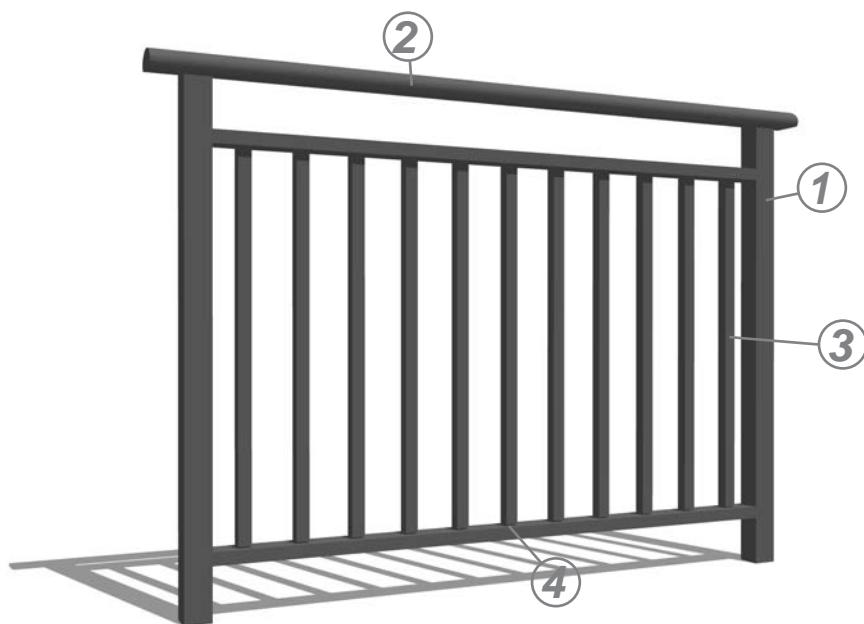

Installations

Option 1:
TOP FIX - Flange Plate
Installed directly on top of the surface using a Flange Plate to secure the post.



Option 2:
SIDE FIX - Tee Bracket
Mounted to the side using a Tee Bracket, with the post seated securely on top.



Option 3:
SIDE FIX - Post Sleeve
A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



Option 4:
SIDE FIX - Direct Mount
Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Option 4 Variation:
SIDE FIX - Direct Mount
Infill can be Extended to align with the bottom of the post for a seamless look.



Option 5:
STAIR RAILING



Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**


Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 5025 GM-SDBL-04

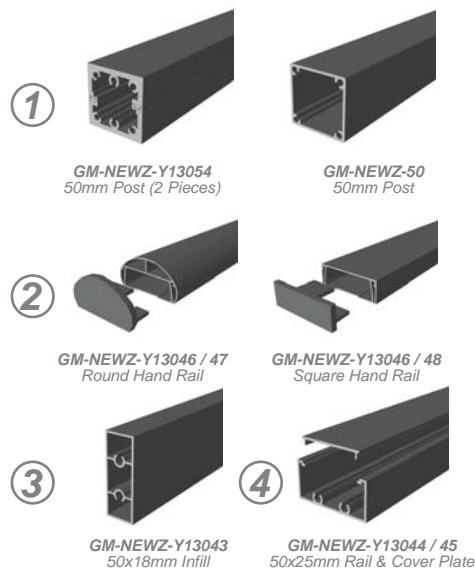

Installations

Option 1:
TOP FIX - Flange Plate
Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:
SIDE FIX - Tee Bracket
Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:
SIDE FIX - Post Sleeve
A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:
SIDE FIX - Direct Mount
Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation:
SIDE FIX - Direct Mount
Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Option 5:
STAIR RAILING
Rails are cut to match the stair angle and fixed from the back of the post with Screws, creating a sleek, bracket-free look.



Self Drilling Screw
M5.5 Hex Washer Screw

Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 5025 GM-SDBL-29

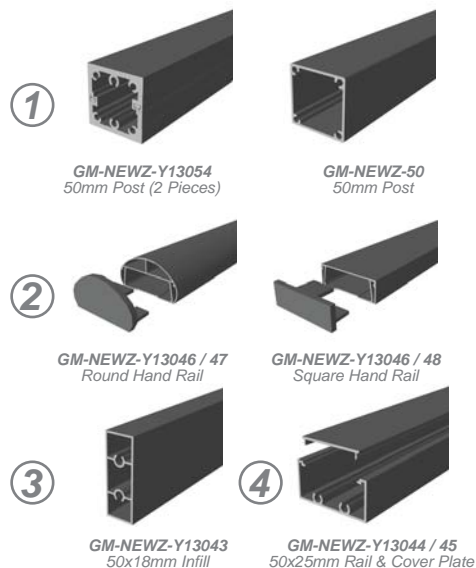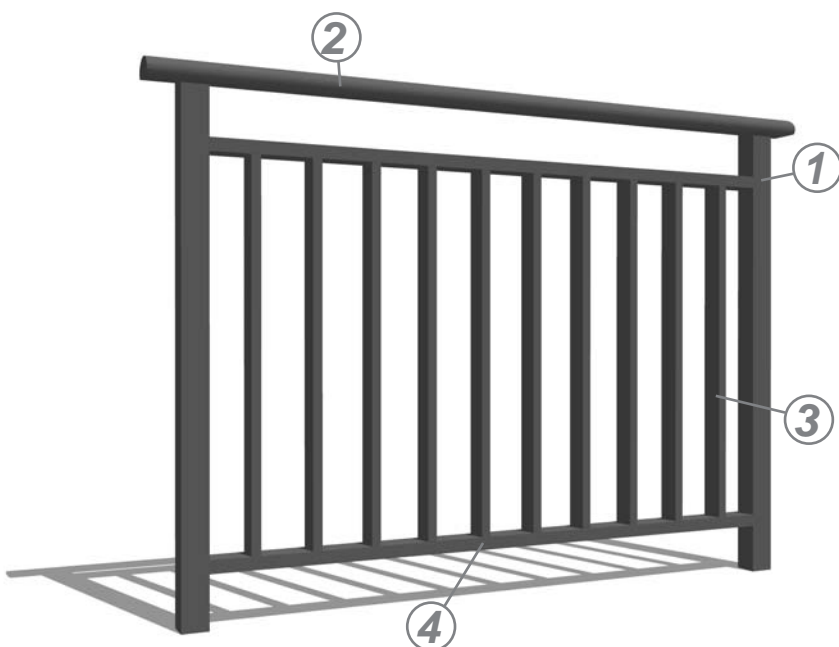

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Option 5:

STAIR RAILING

Rails are cut to match the stair angle and fixed from the back of the post with Screws, creating a sleek, bracket-free look.



Self Drilling Screw
M5.5 Hex Washer Screw

Panel Standard Sizes

Height 1.0m - 1.2m

Width 1.0m - 1.5m



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 5025 GM-SDBL-30

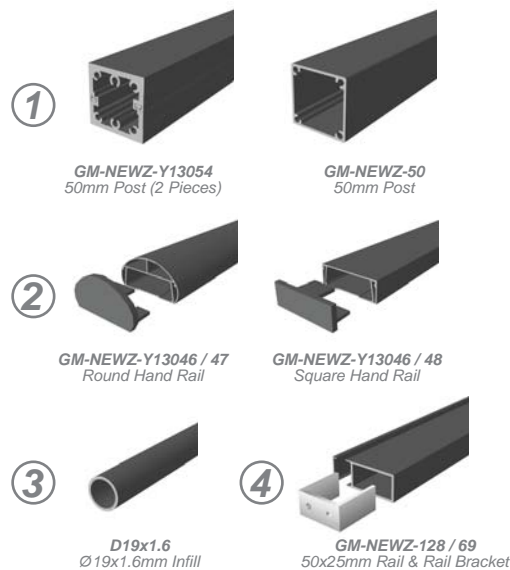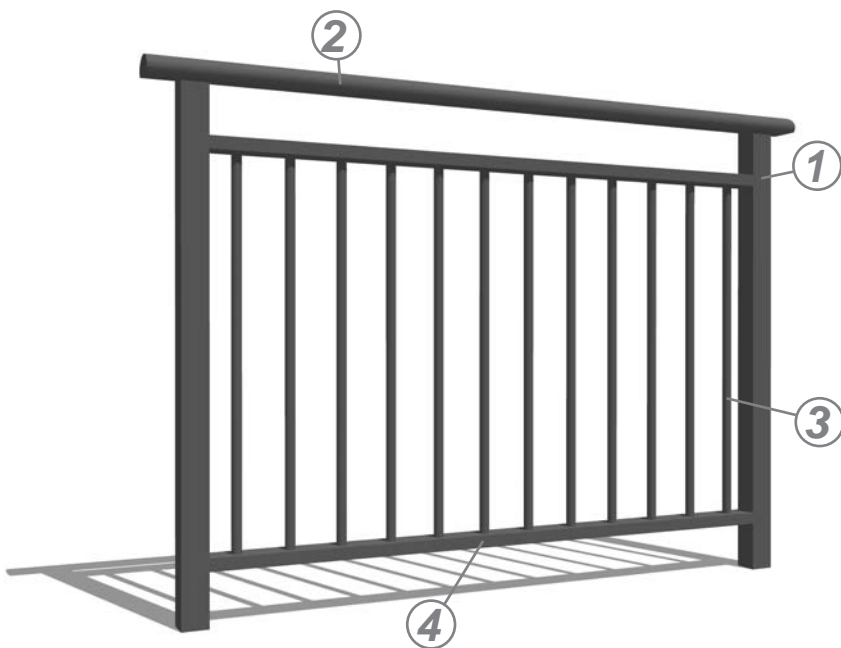

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Option 5:

STAIR RAILING

Rails are cut to match the stair angle and fixed from the back of the post with Screws, creating a sleek, bracket-free look.



SL-417
Adjustable Rail Bracket

Panel Standard Sizes

Height 1.0m - 1.2m

Width 1.0m - 1.5m



Other sizes can be customized according to customer preferences.

Standard Color Options

Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 5025 GM-SDBL-31

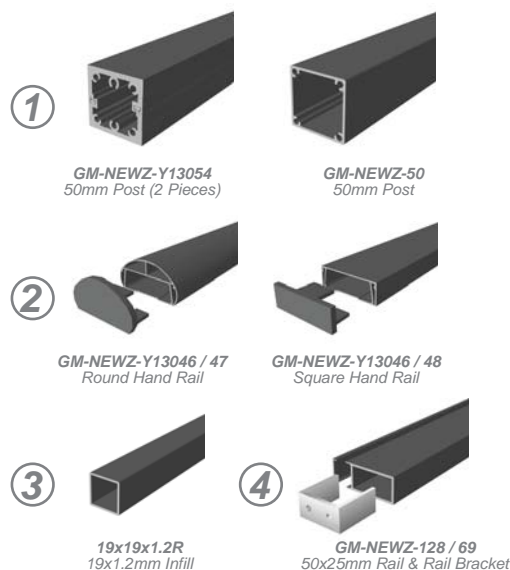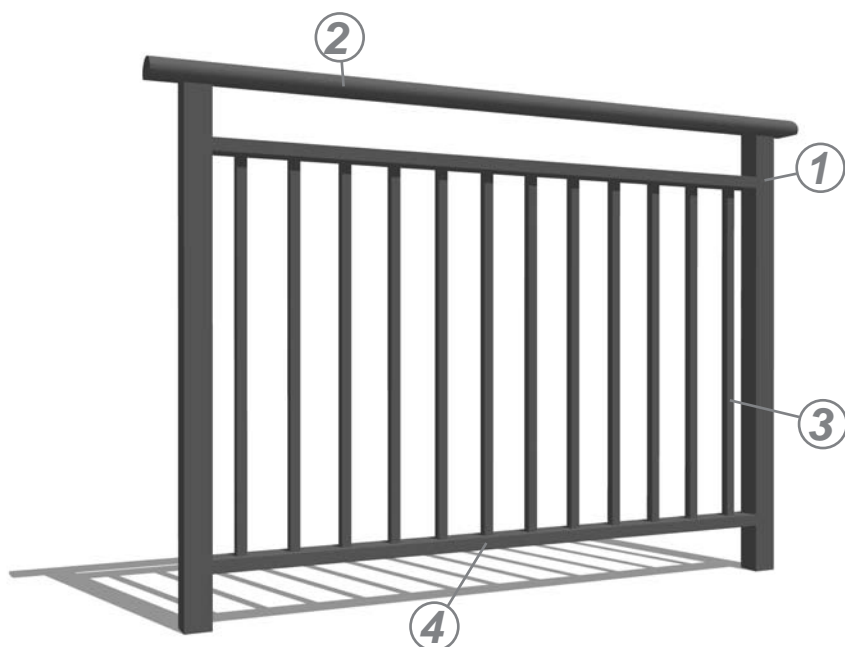

Installations

Option 1:
TOP FIX - Flange Plate
Installed directly on top of the surface using a Flange Plate to secure the post.



Option 2:
SIDE FIX - Tee Bracket
Mounted to the side using a Tee Bracket, with the post seated securely on top.



Option 3:
SIDE FIX - Post Sleeve
A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



Option 4:
SIDE FIX - Direct Mount
Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Option 4 Variation:
SIDE FIX - Direct Mount
Infill can be Extended to align with the bottom of the post for a seamless look.



Option 5:
STAIR RAILING
Rails are secured with Adjustable Brackets, allowing precise angle alignment and a clean finish.



Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 **Matt Black**
Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 3825 GM-SDBL-32

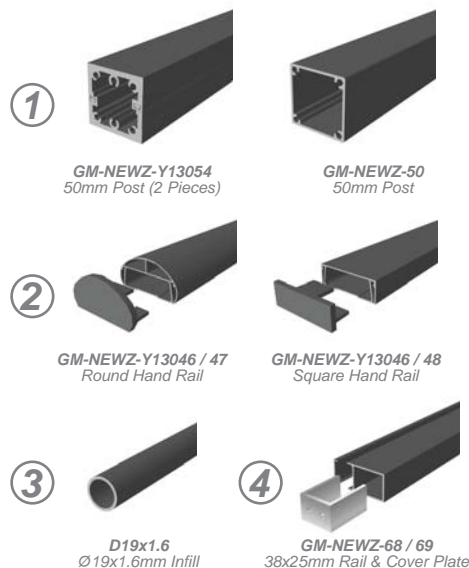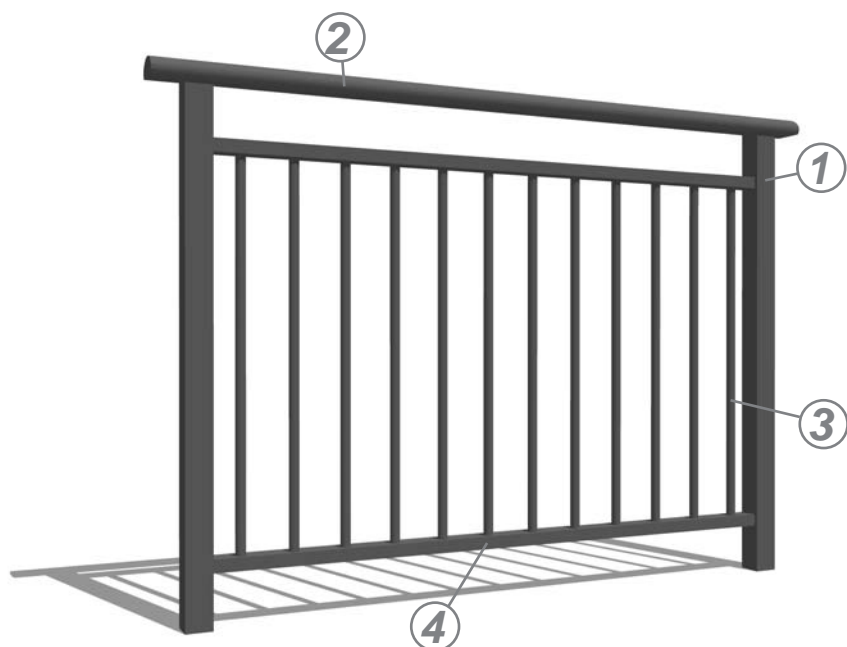

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Option 5:

STAIR RAILING

Rails are cut to match the stair angle and fixed from the back of the post with Screws, creating a sleek, bracket-free look.



Panel Standard Sizes

Height 1.0m - 1.2m

Width 1.0m - 1.5m



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 3825 GM-SDBL-33

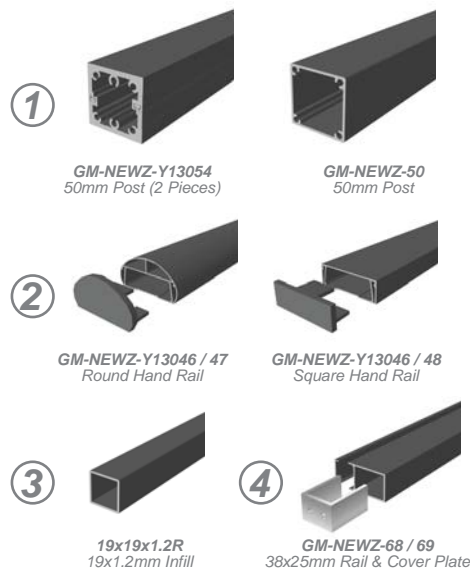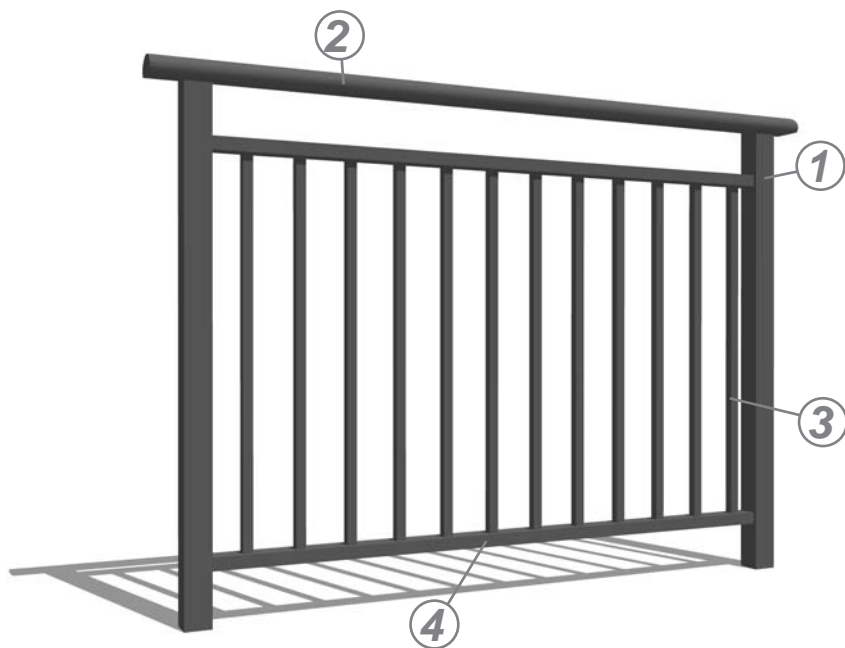

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Option 5:

STAIR RAILING

Rails are secured with Adjustable Brackets, allowing precise angle alignment and a clean finish.



SL-417
Adjustable Rail Bracket

Panel Standard Sizes

Height **1.0m - 1.2m**

Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 4040 GM-SDBL-34

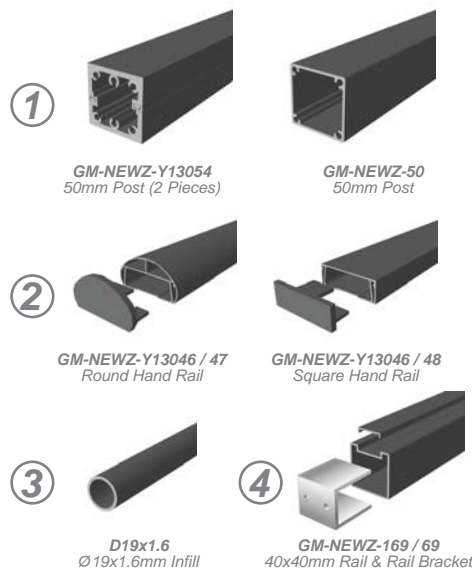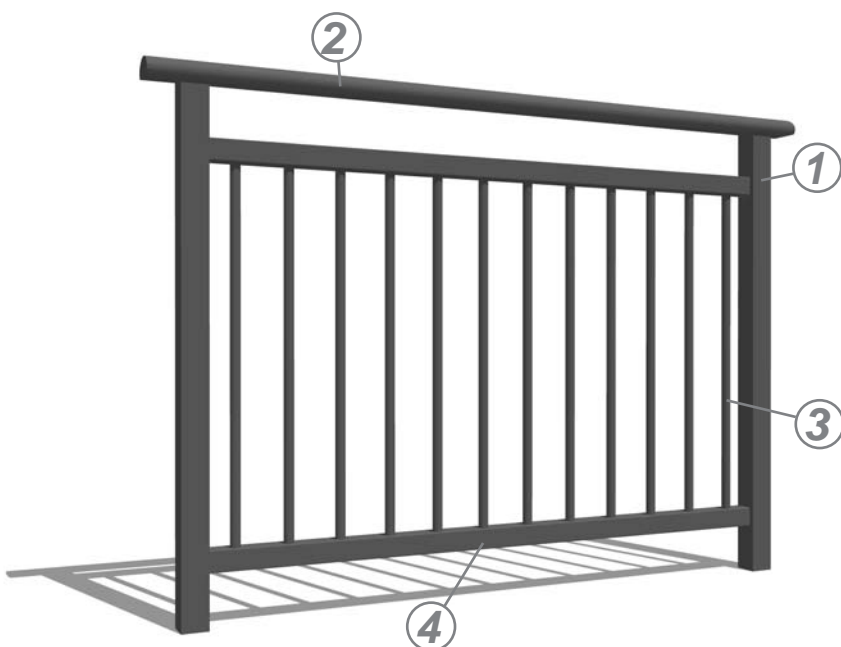

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Option 5:

STAIR RAILING

Rails are cut to match the stair angle and fixed from the back of the post with Screws, creating a sleek, bracket-free look.



Panel Standard Sizes

Height 1.0m - 1.2m

Width 1.0m - 1.5m



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

GapLine 4040 GM-SDBL-35

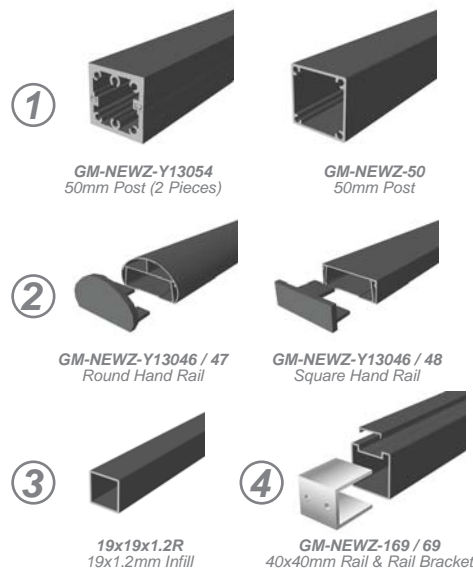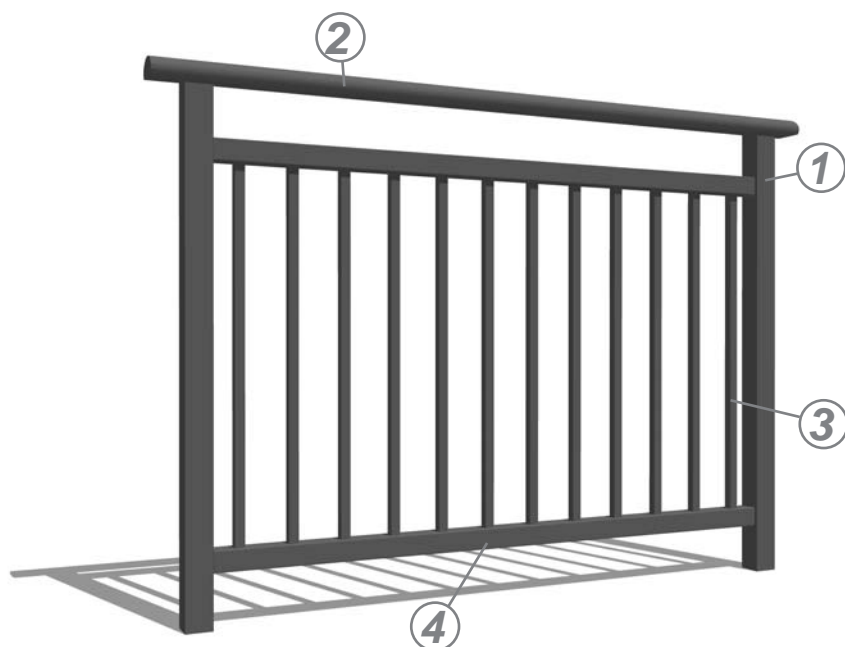

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Option 5:

STAIR RAILING

Rails are cut to match the stair angle and fixed from the back of the post with Screws, creating a sleek, bracket-free look.



SL-417
Adjustable Rail Bracket

Panel Standard Sizes

Height **1.0m - 1.2m**

Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

LinearView GM-SDBL-15

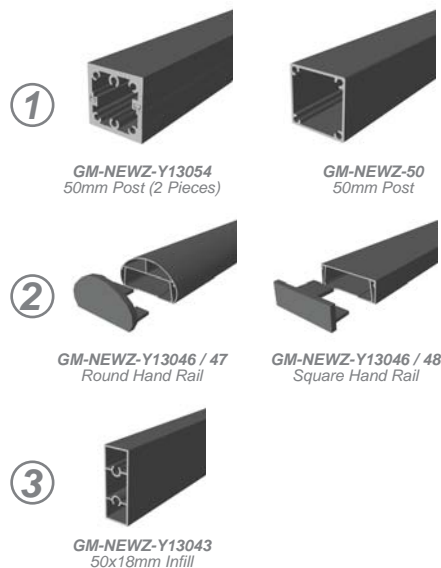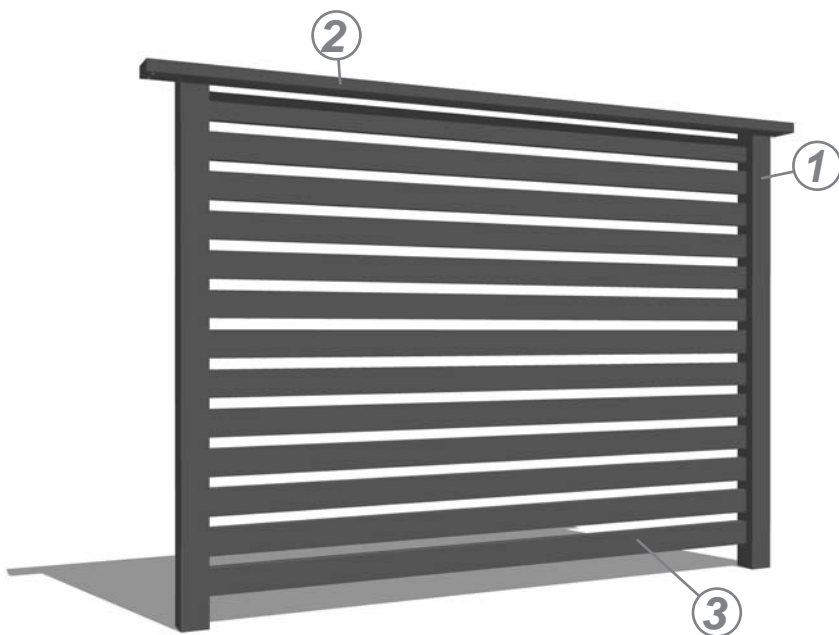


Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.

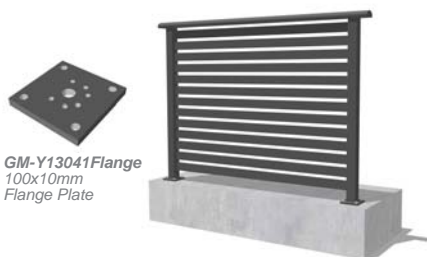

GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.




Coach Screws
M12 diameter

Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.

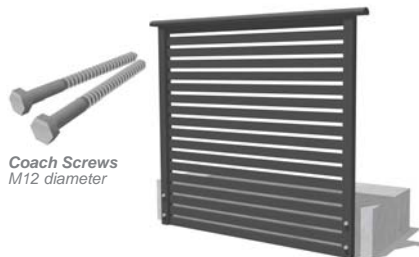

Coach Screws
M12 diameter

Panel Standard Sizes

Height **1.0m - 1.2m**

Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

LinearView GM-SDBL-36

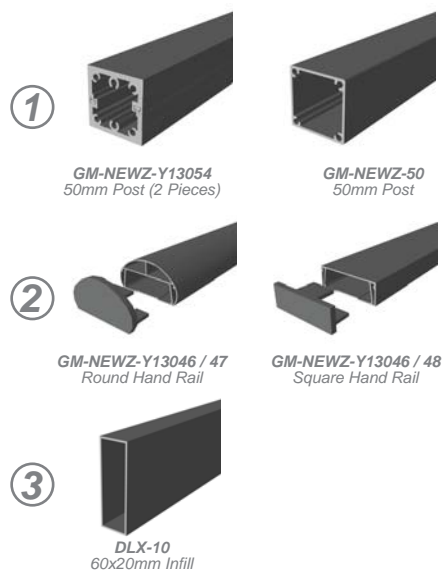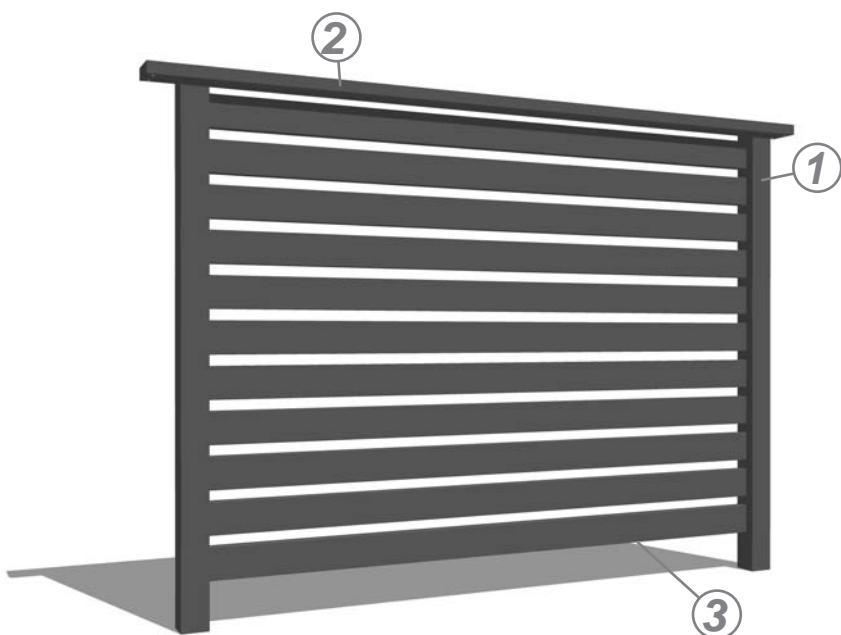

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.




Coach Screws
M12 diameter

Option 4 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.

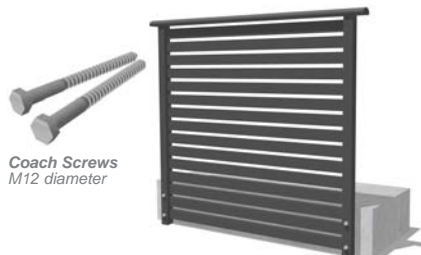

Coach Screws
M12 diameter

Panel Standard Sizes

Height **1.0m - 1.2m**

Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.

LinearView GM-SDBL-37

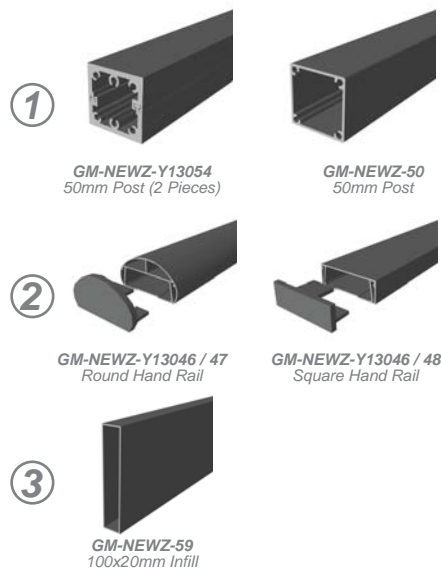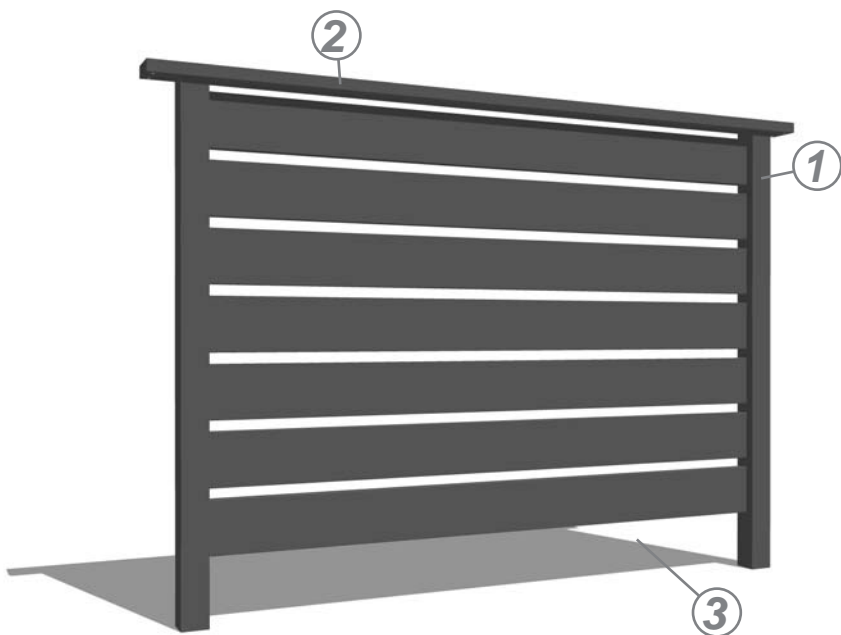

Installations

Option 1: TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2: SIDE FIX - Tee Bracket

Mounted to the side using a Tee Bracket, with the post seated securely on top.



GM-NEWZ-Y13013
Post Tee Bracket

Option 3: SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 4: SIDE FIX - Direct Mount


Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 4 Variation: SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.

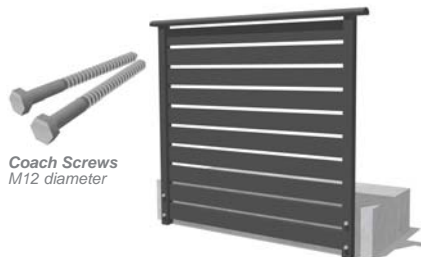

Coach Screws
M12 diameter

Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**


Other sizes can be customized according to customer preferences.

Standard Color Options

 **Matt Black**
Powdercoating

Additional colours can be customised to complement your home's exterior.

FrameLine 4040 GM-SDBL-20

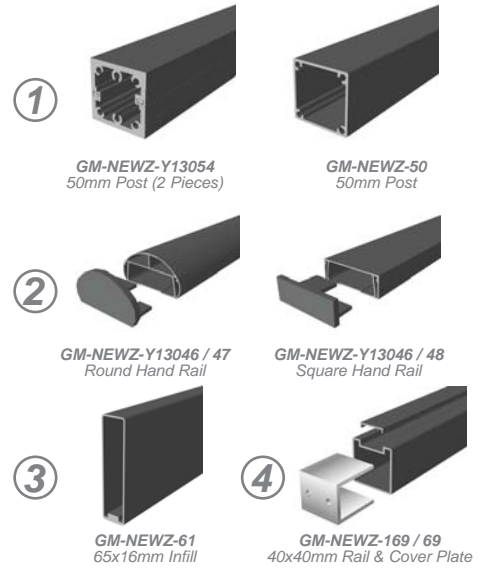

Installations

Option 1:
TOP FIX - Flange Plate
Installed directly on top of the surface using a Flange Plate to secure the post.



Option 2:
SIDE FIX - Direct Mount
Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Option 2 Variation:
SIDE FIX - Direct Mount
Infill can be Extended to align with the bottom of the post for a seamless look.



Option 3:
SIDE FIX - Post Sleeve
A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



Option 3 Variation:
SIDE FIX - Post Sleeve
Infill can be Extended to align with the bottom of the post for a seamless look.



Option 5:
STAIR RAILING
Rails are secured with Adjustable Brackets, allowing precise angle alignment and a clean finish.



Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**

Other sizes can be customized according to customer preferences.



Standard Color Options

 **Mat Black Powdercoating**

Additional colours can be customised to complement your home's exterior.

FrameLine 4040 GM-SDBL-19

② OPTIONAL HANDRAIL

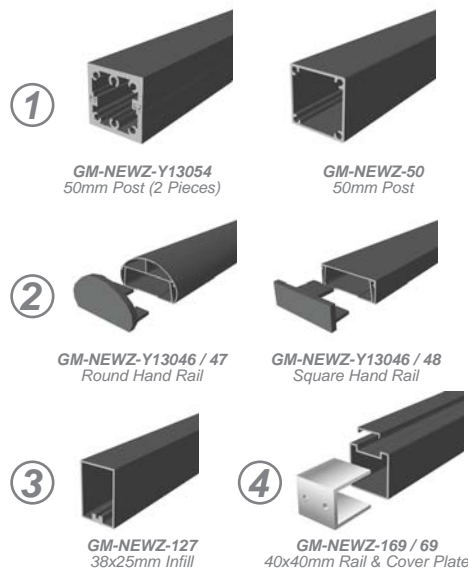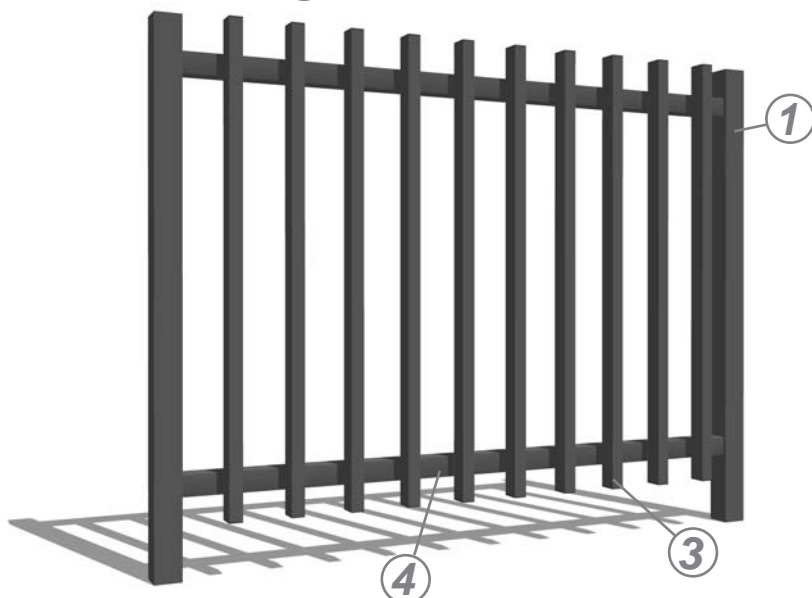

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 2 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Option 3:

SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 3 Variation:

SIDE FIX - Post Sleeve

Infill can be Extended to align with the bottom of the post for a seamless look.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 5:

STAIR RAILING

Rails are secured with Adjustable Brackets, allowing precise angle alignment and a clean finish.



SL-417
Adjustable Rail Bracket

Panel Standard Sizes

Height 1.0m - 1.2m

Width 1.0m - 1.5m


Other sizes can be customized according to customer preferences.

Standard Color Options

Matt Black Powdercoating

Additional colours can be customised to complement your home's exterior.

FrameLine 4040 GM-SDBL-38

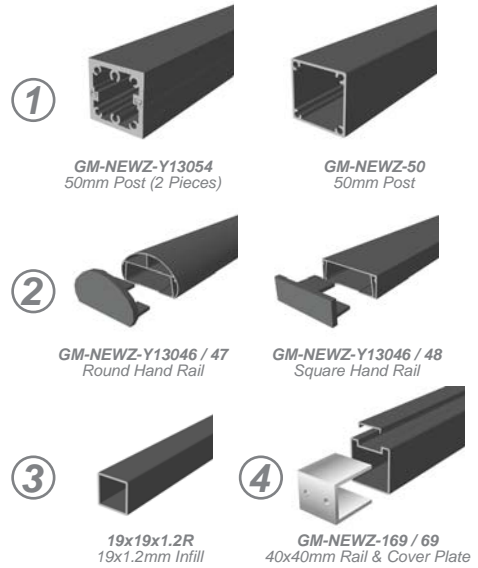

Installations

Option 1:
TOP FIX - Flange Plate
Installed directly on top of the surface using a Flange Plate to secure the post.



Option 2:
SIDE FIX - Direct Mount
Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Option 2 Variation:
SIDE FIX - Direct Mount
Infill can be Extended to align with the bottom of the post for a seamless look.



Option 3:
SIDE FIX - Post Sleeve
A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



Option 4:
STAIR RAILING
Rails are secured with Adjustable Brackets, allowing precise angle alignment and a clean finish.



Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**



Other sizes can be customized according to customer preferences.

Standard Color Options

 **Matt Black Powdercoating**

Additional colours can be customised to complement your home's exterior.

FrameLine 5025 GM-SDBL-18

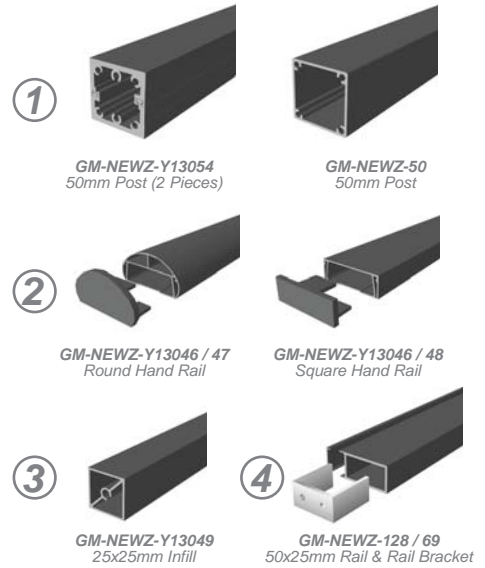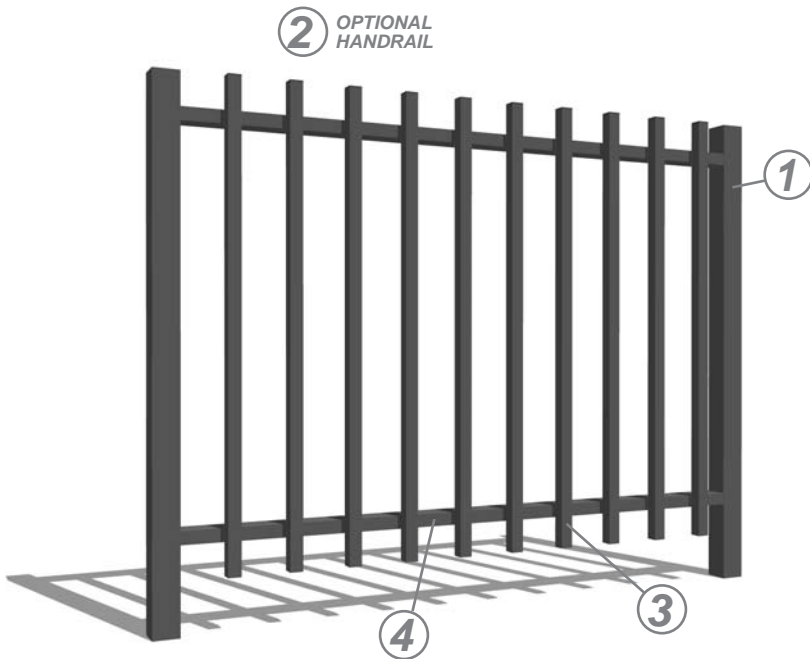

Installations

Option 1:
TOP FIX - Flange Plate
Installed directly on top of the surface using a Flange Plate to secure the post.



Option 2:
SIDE FIX - Direct Mount
Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Option 2 Variation:
SIDE FIX - Direct Mount
Infill can be Extended to align with the bottom of the post for a seamless look.



Option 3:
SIDE FIX - Post Sleeve
A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



Option 3 Variation:
SIDE FIX - Post Sleeve
Infill can be Extended to align with the bottom of the post for a seamless look.



Option 5:
STAIR RAILING
Rails are secured with Adjustable Brackets, allowing precise angle alignment and a clean finish.



Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**

Other sizes can be customized according to customer preferences.



Standard Color Options

 Matt Black Powdercoating

Additional colours can be customised to complement your home's exterior.

FrameLine 5025 GM-SDBL-17

② OPTIONAL HANDRAIL

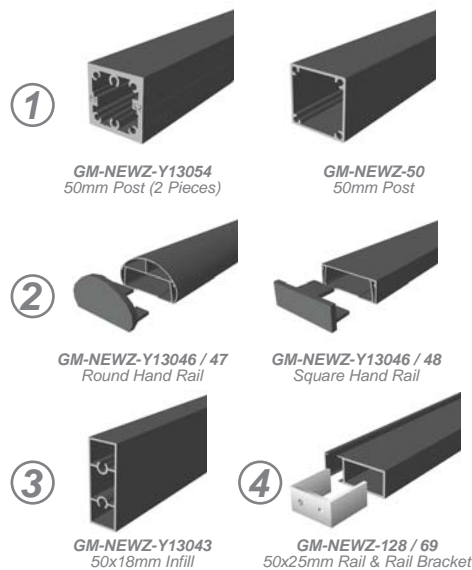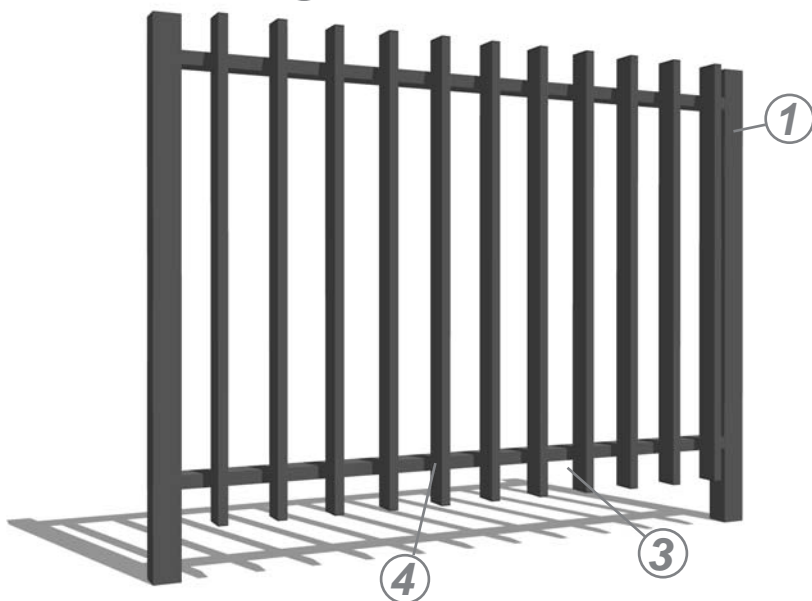

Installations

Option 1: TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



GM-Y13041 Flange
100x10mm
Flange Plate

Option 2: SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter

Option 2 Variation: SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter

Option 3: SIDE FIX - Post Sleeve

A Post Sleeve is fixed to the side surface, and the post is inserted and bolted into place.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 3 Variation: SIDE FIX - Post Sleeve

Infill can be Extended to align with the bottom of the post for a seamless look.



GM-NEWZ-Y13016
Post Sleeve
& End Cap

Option 5: STAIR RAILING

Rails are secured with Adjustable Brackets, allowing precise angle alignment and a clean finish.



SL-417
Adjustable Rail Bracket

Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**

Other sizes can be customized according to customer preferences.

Standard Color Options

Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.



Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**


Other sizes can be customized according to customer preferences.

Standard Color Options

 *Matt Black Powdercoating*

Additional colours can be customised to complement your home's exterior.


SkyLine GM-SDBL-06

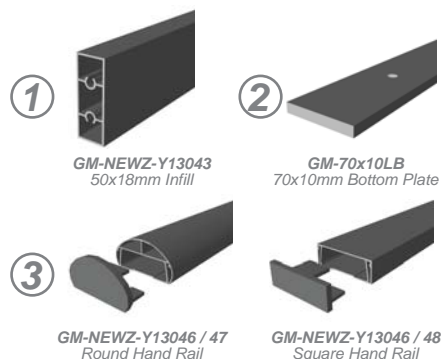

Installations

Option 1: TOP FIX - Flat Bar

Installed directly on top of the surface using a Flat Bar to secure the Infills.

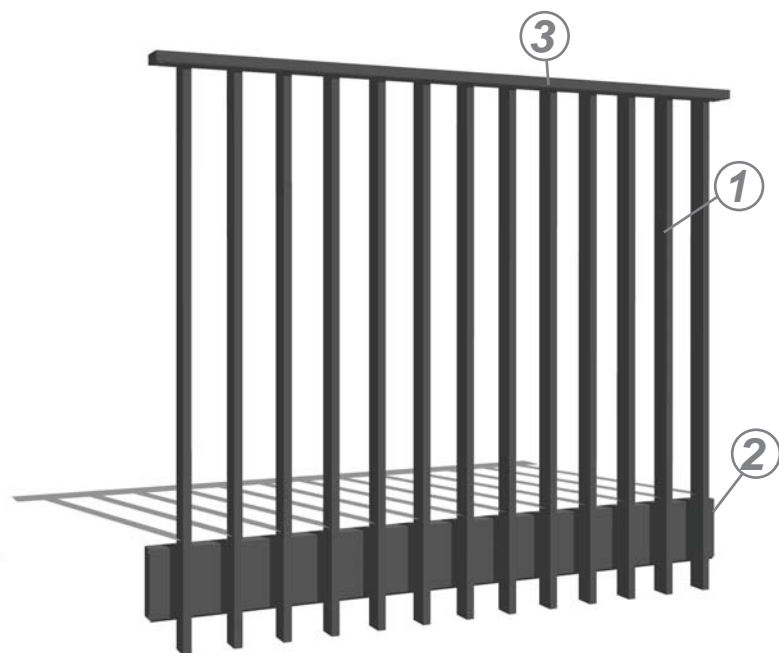

Panel Standard Sizes

Height **1.0m - 1.2m**
Width **1.0m - 1.5m**


Other sizes can be customized according to customer preferences.

Standard Color Options

 *Matt Black Powdercoating*

Additional colours can be customised to complement your home's exterior.


FloatLine GM-SDBL-07

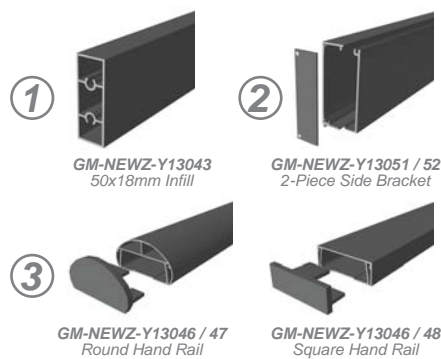

Installations


Option 1: SIDE FIX - Wall Edge Bracket

This profile is using a 2-Piece Side Bracket secures the panel directly to the side surface.

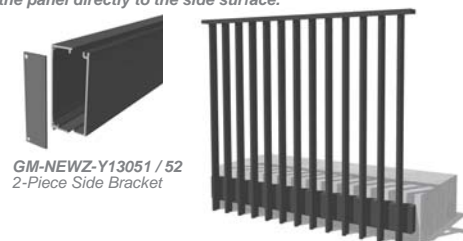


CrossLine 5025 GM-SDBL-39

2 OPTIONAL HANDRAIL

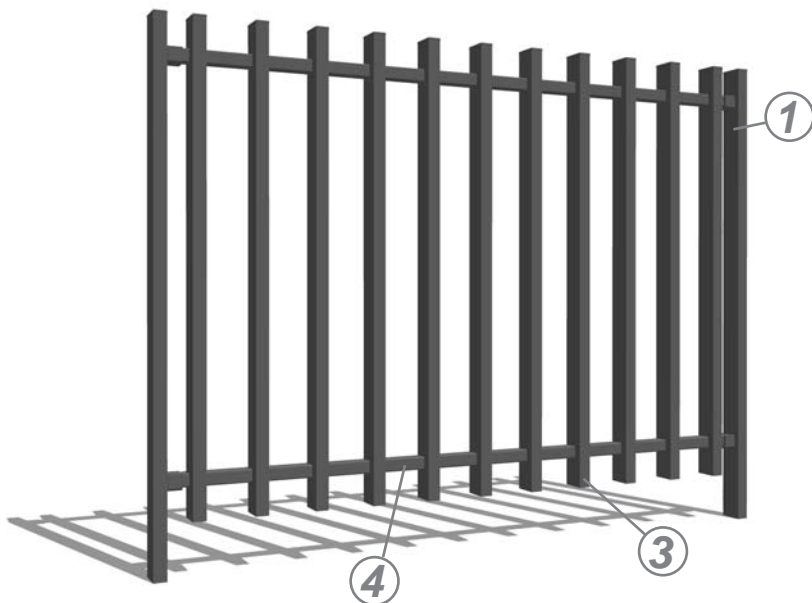


1




GM-NEWZ-209
50mm Post

2




GM-NEWZ-Y13046 / 47
Round Hand Rail




GM-NEWZ-Y13046 / 48
Square Hand Rail

3



GM-NEWZ-Y13043
50x18mm Infill

4



25x25x3R
25x25mm Rail

Installations

Option 1:

TOP FIX - Flange Plate

Installed directly on top of the surface using a Flange Plate to secure the post.



SL-419
For 50x25mm Post
Flange Plate



Option 2:

SIDE FIX - Direct Mount

Post is fixed directly to the side surface using Coach Screws or Anchor Bolts, with no brackets or sleeves.



Coach Screws
M12 diameter



Option 2 Variation:

SIDE FIX - Direct Mount

Infill can be Extended to align with the bottom of the post for a seamless look.



Coach Screws
M12 diameter



Panel Standard Sizes

Height 1.0m - 1.2m

Width 1.0m - 1.5m

Other sizes can be customized according to customer preferences.

Standard Color Options

 Matt Black
Powdercoating

Additional colours can be customised to complement your home's exterior.



Contact Us Now!

Auckland Rosedale Branch

Address: 6 John Glenn Ave, Rosedale,
Auckland 0632

Email: info.albany@sdalu.co.nz

Phone: 09 - 218 2188
09 - 218 2111

Auckland Manukau Branch

Address: 28 Ryan Pl, Manukau City,
Auckland 2104

Email: info.manukau@sdalu.co.nz

Phone: 09 - 217 8666

Christchurch Wigram Branch

Address: 67 Vickerys Rd, Wigram,
Christchurch 8042

Email: info.chch@sdalu.co.nz

Phone: 03 - 366 6669

Follow Us on Social Media

